

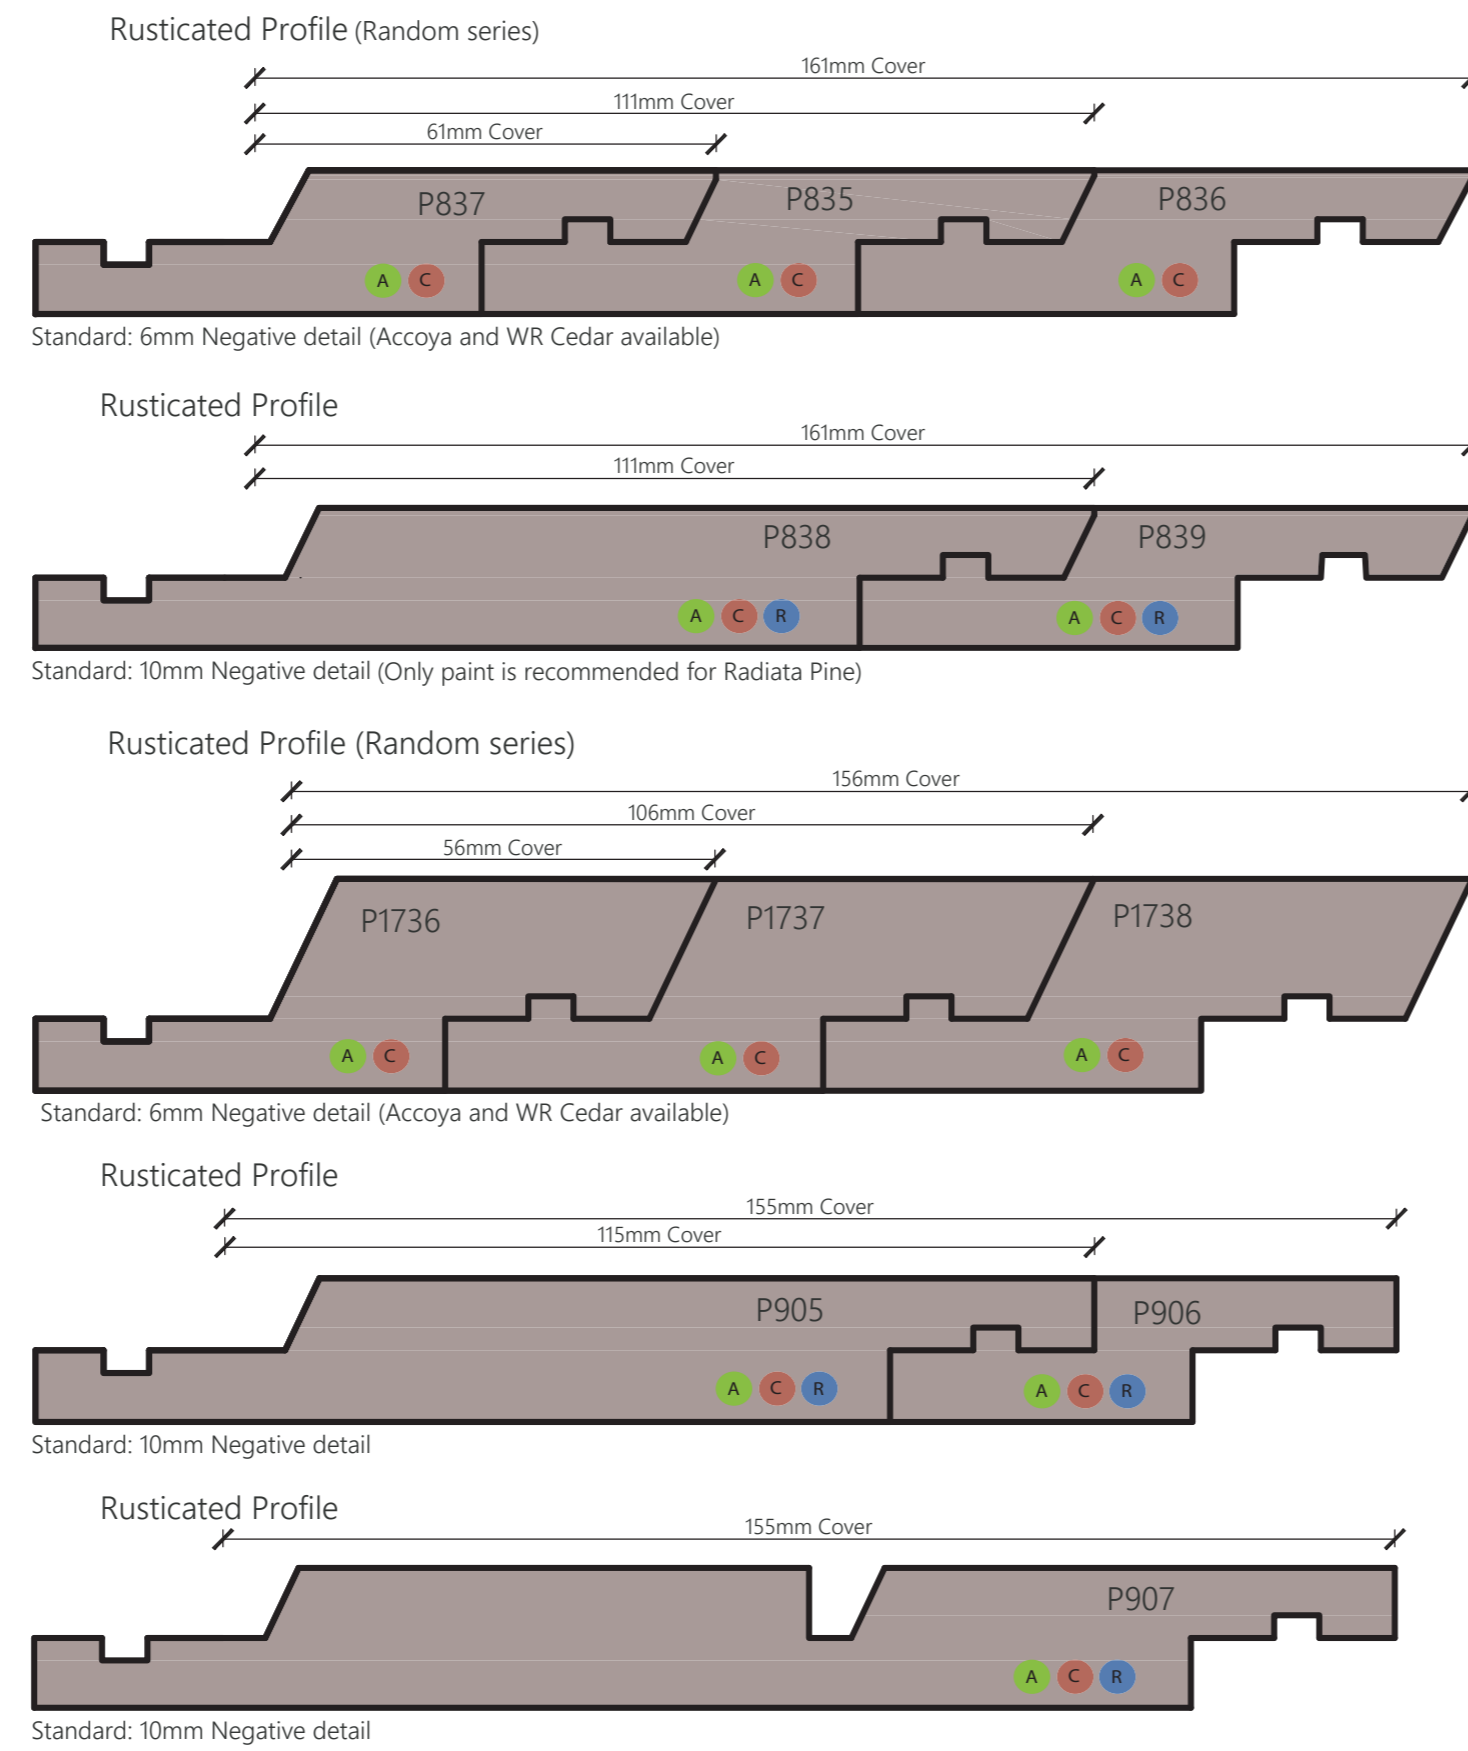


HORIZONTAL WEATHERBOARD PROFILES

A ACCOYA® 19mm thick **C WESTERN RED CEDAR** 18.5mm thick **R RADIATA PINE** 19mm thick


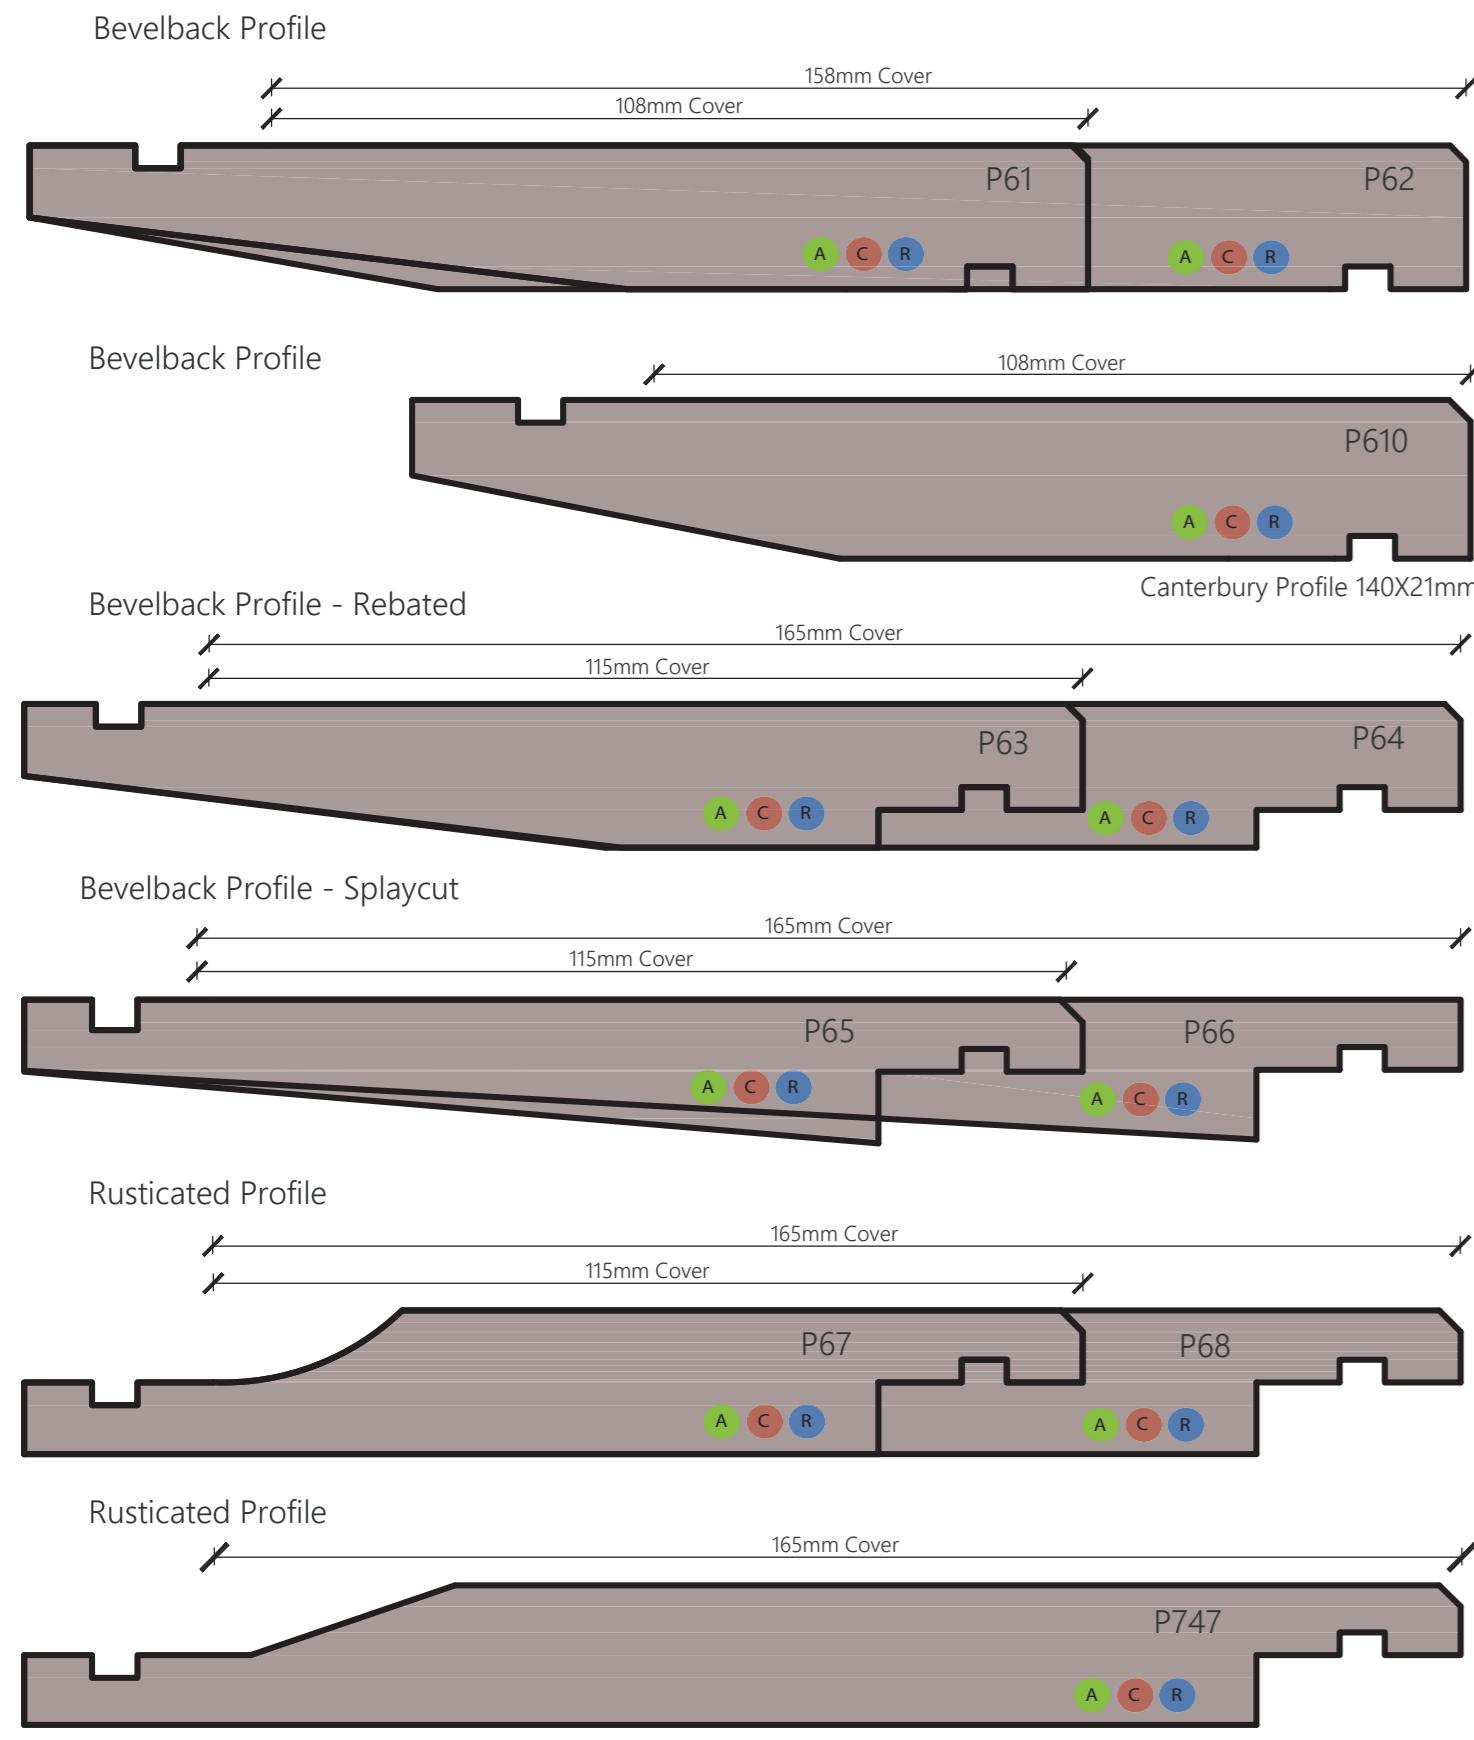


FASCIA

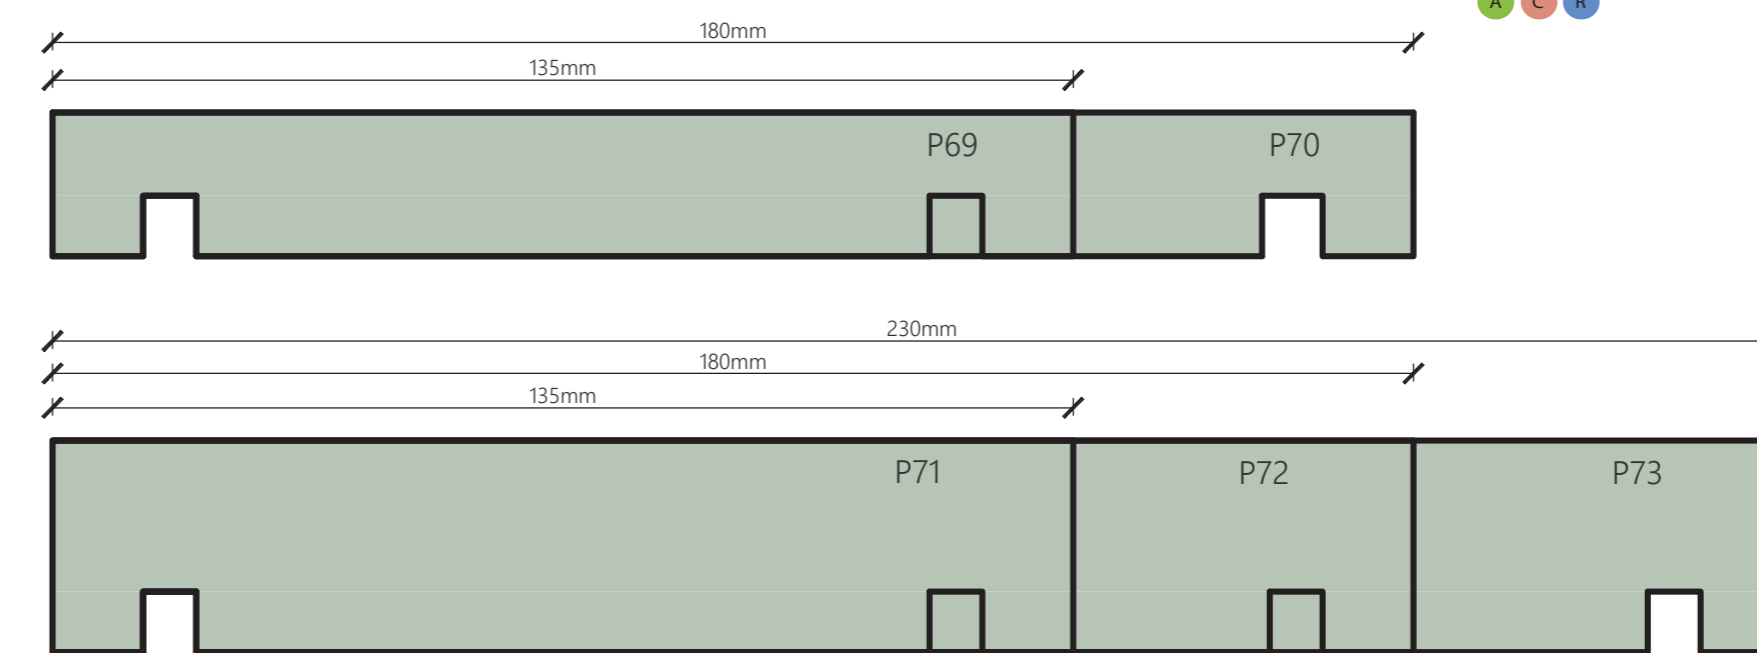


VERTICAL WEATHERBOARD PROFILES


A ACCOYA® 19mm thick **C WESTERN RED CEDAR** 18.5mm thick **R RADIATA PINE** 19mm thick

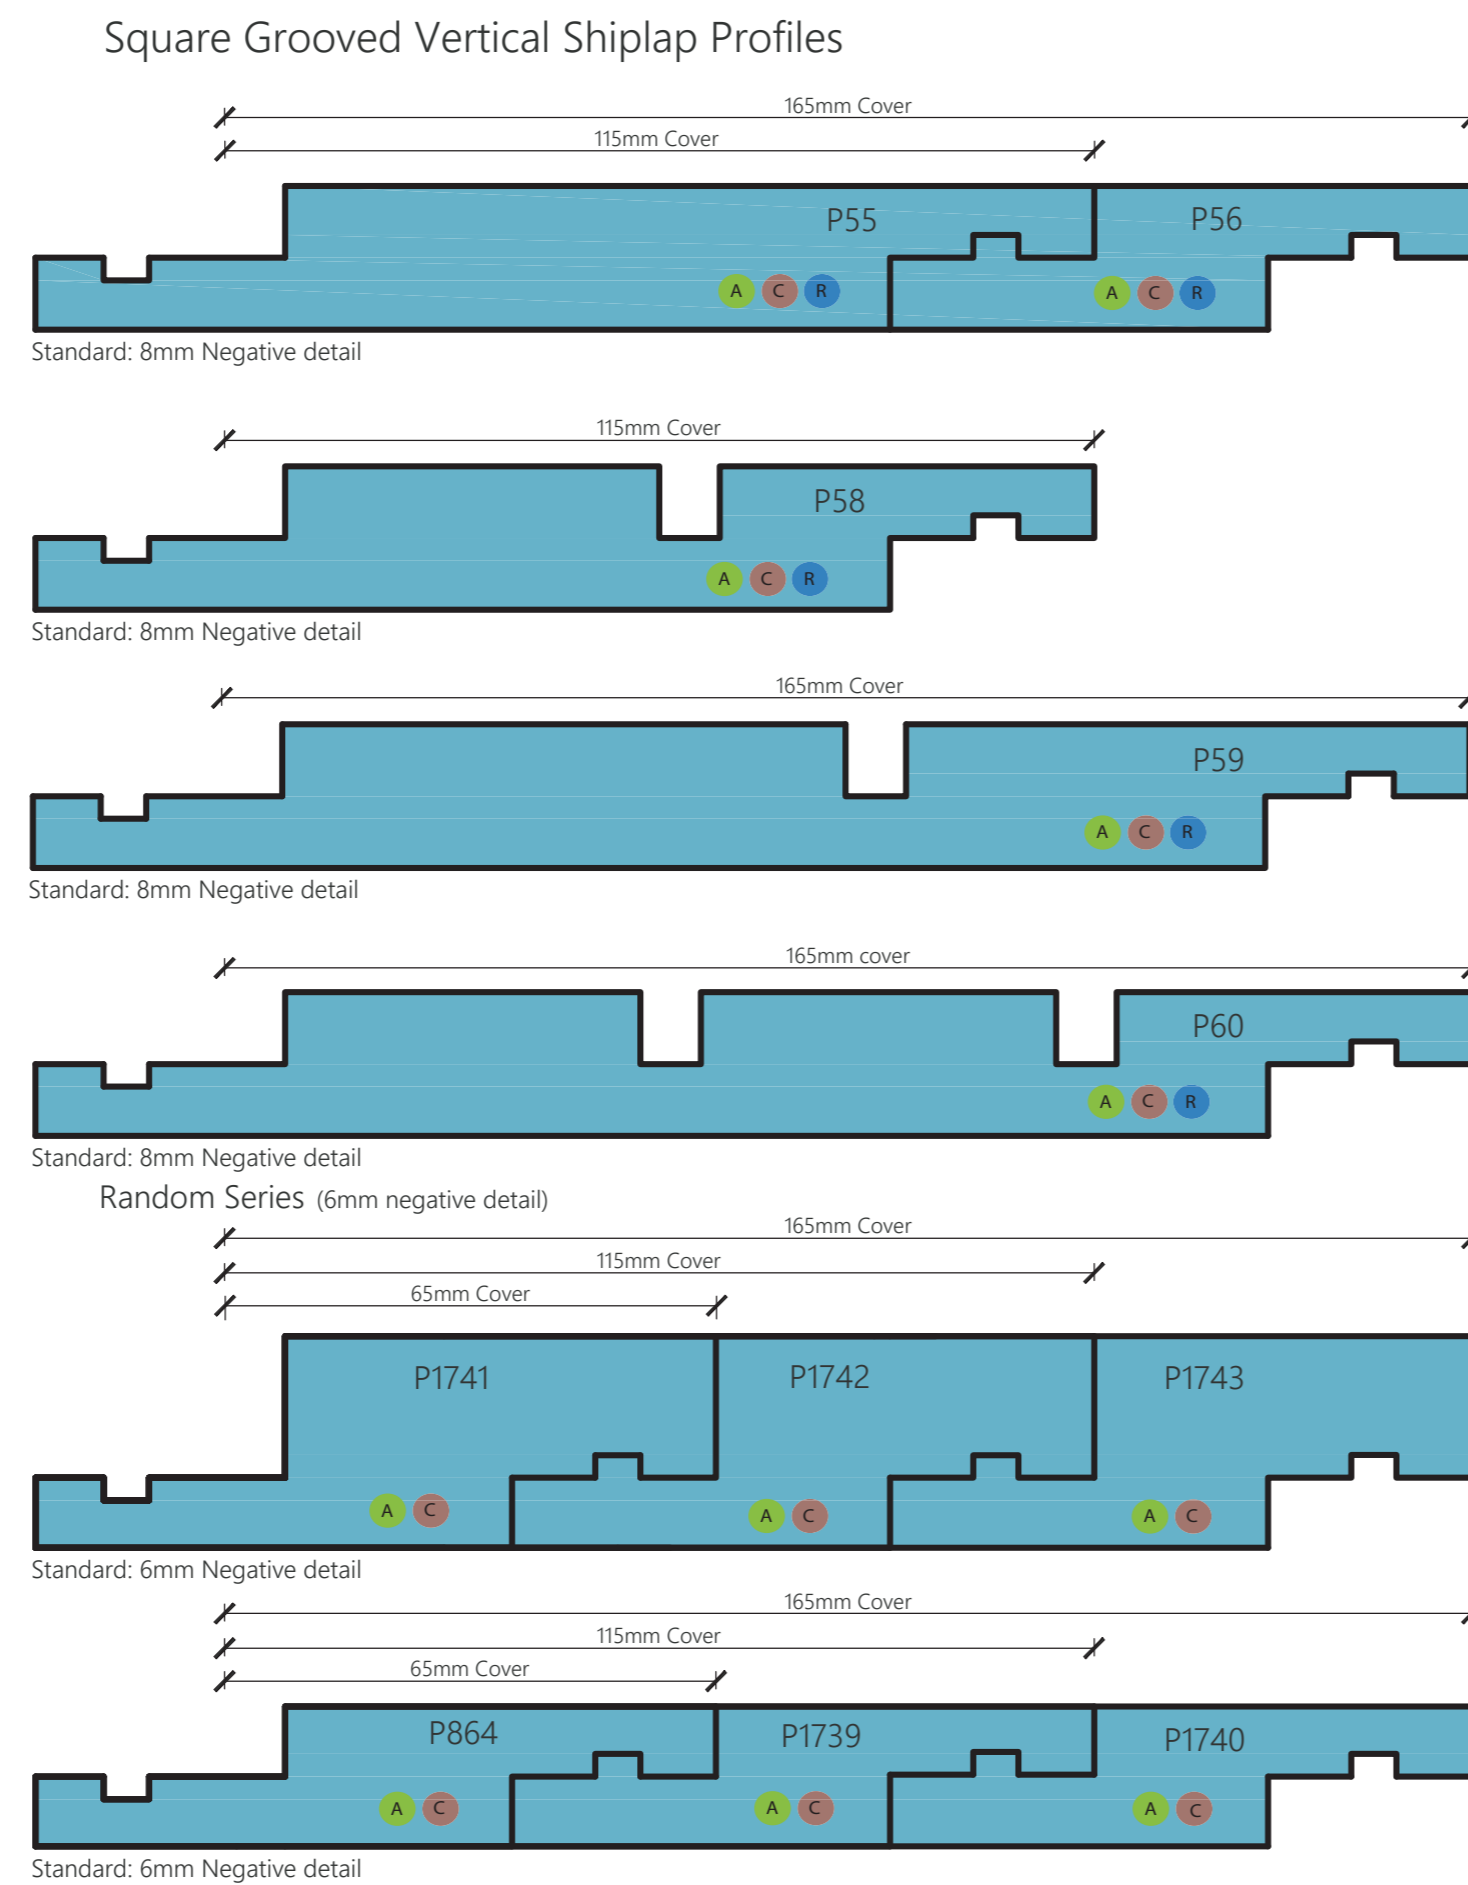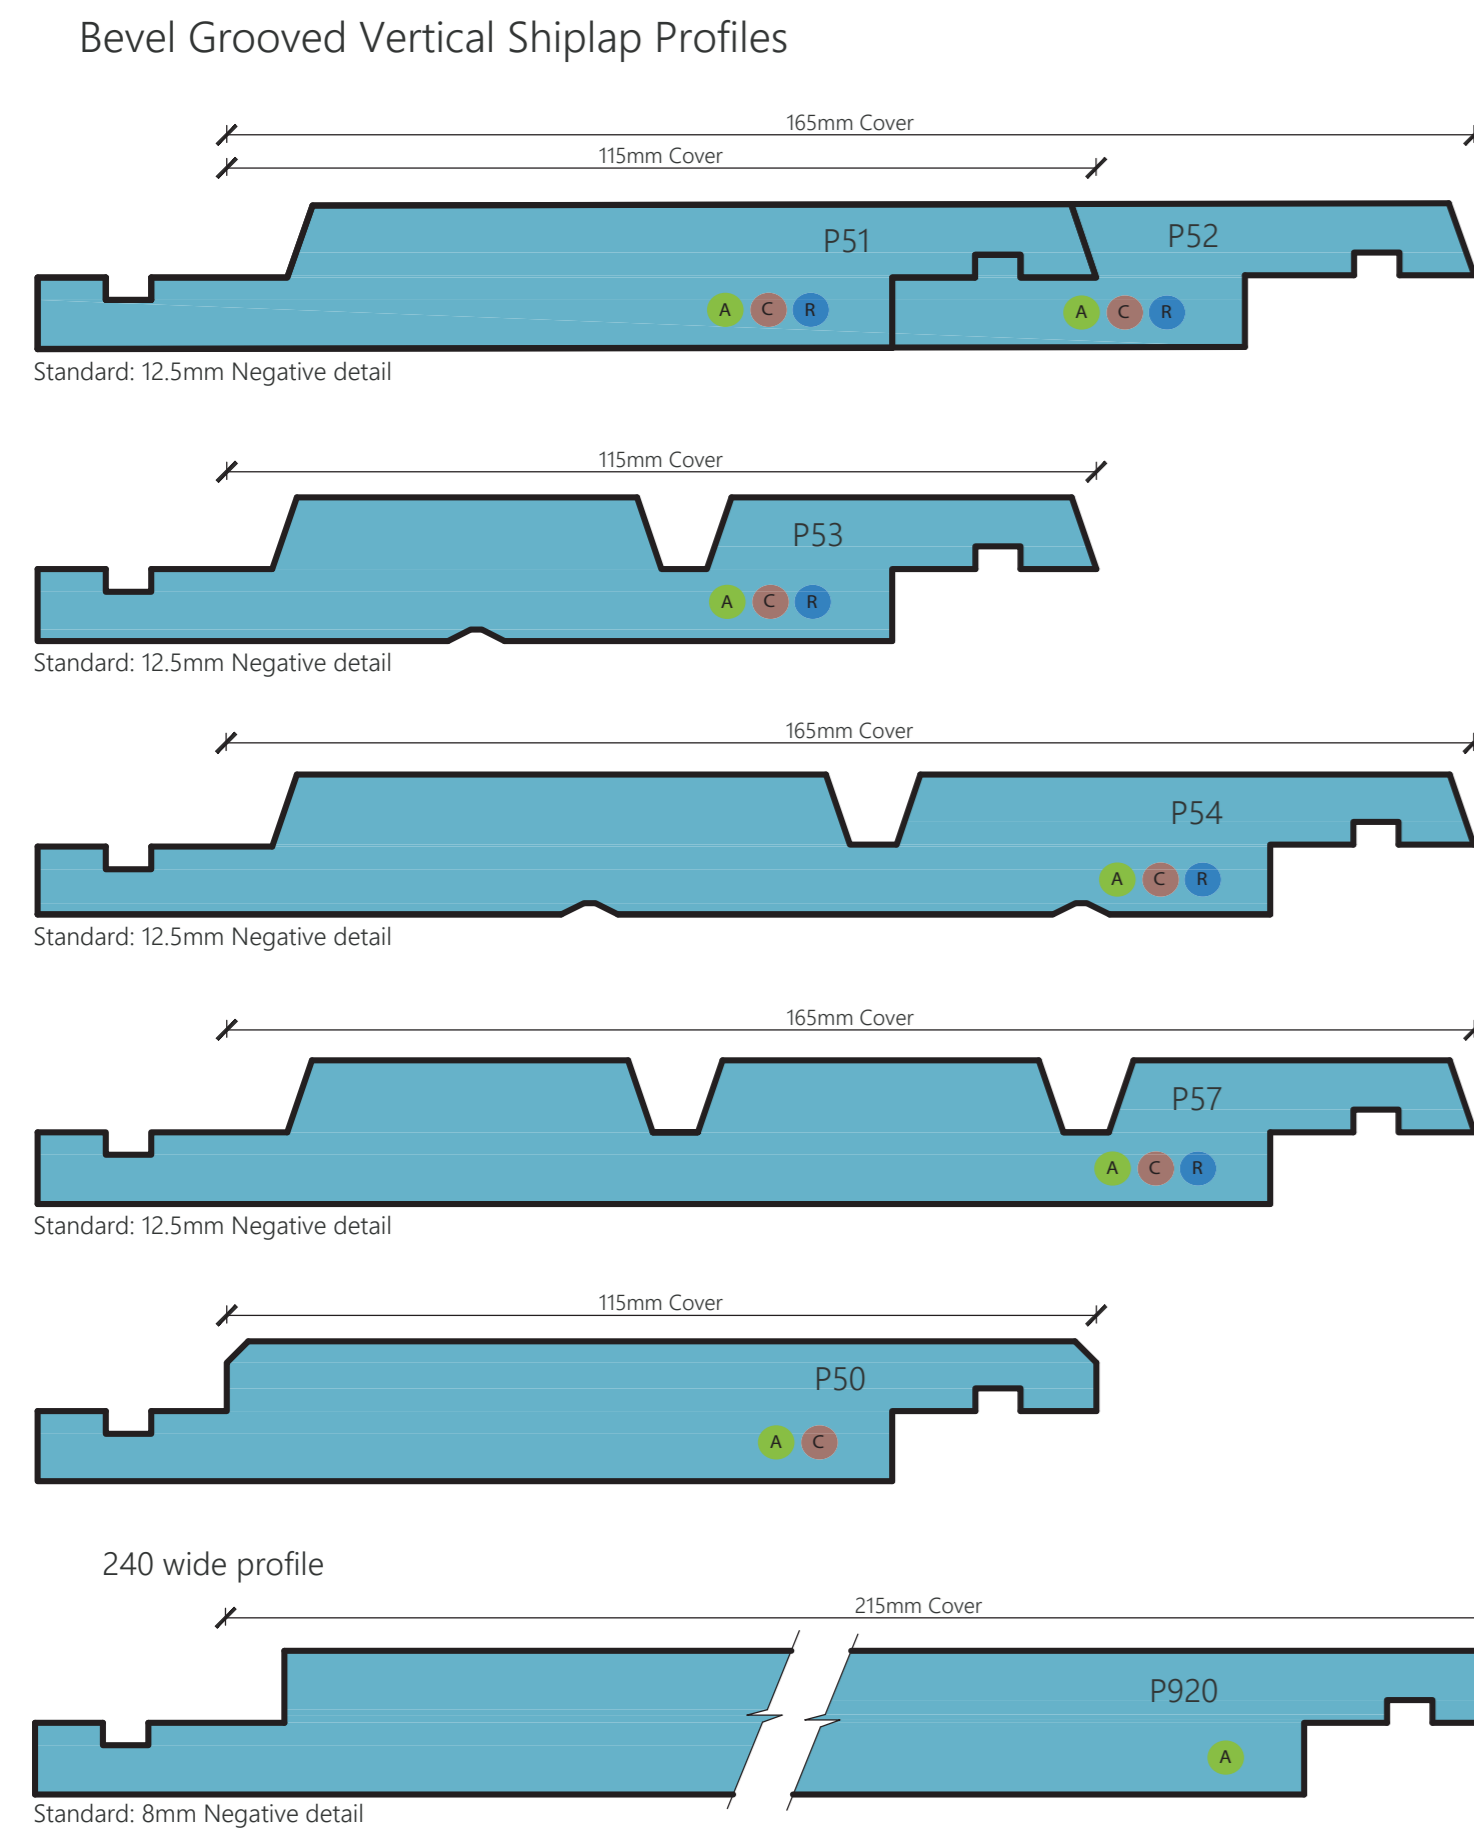

T&G PANNELLING AND SARKING

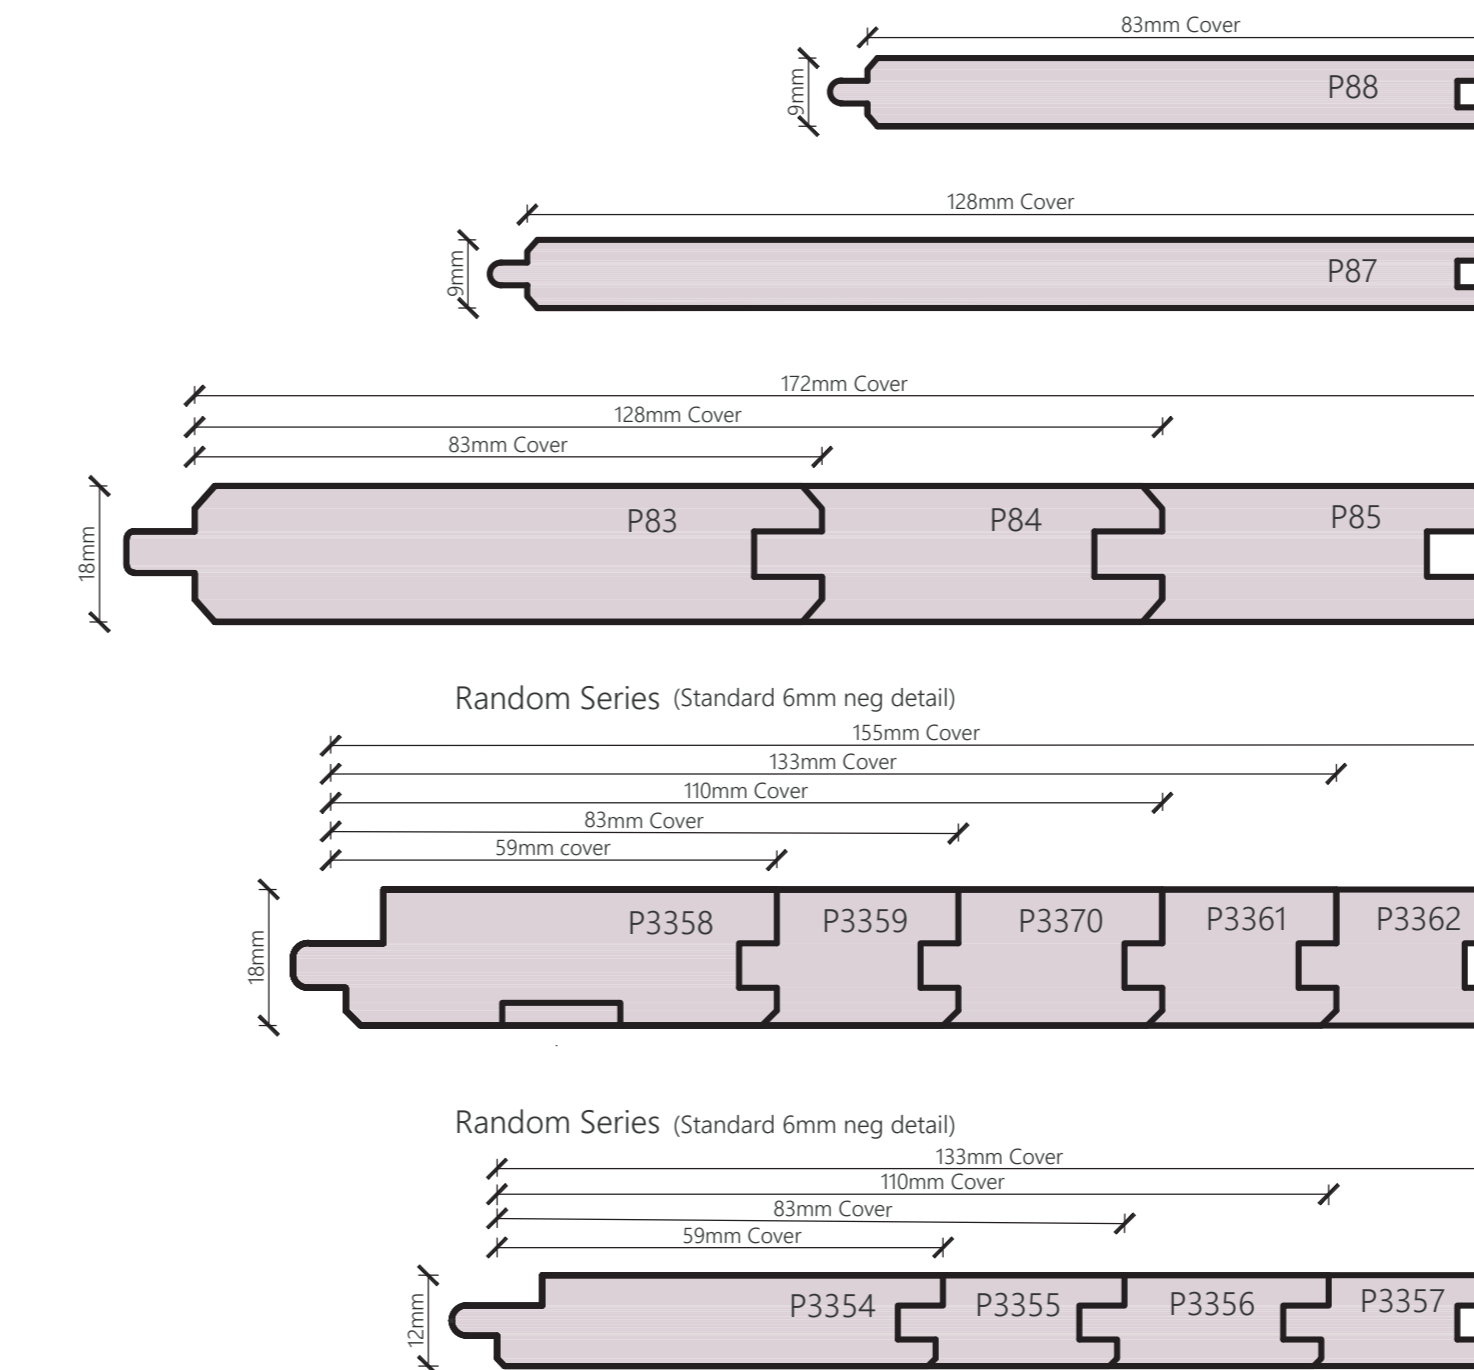

MOULDINGS

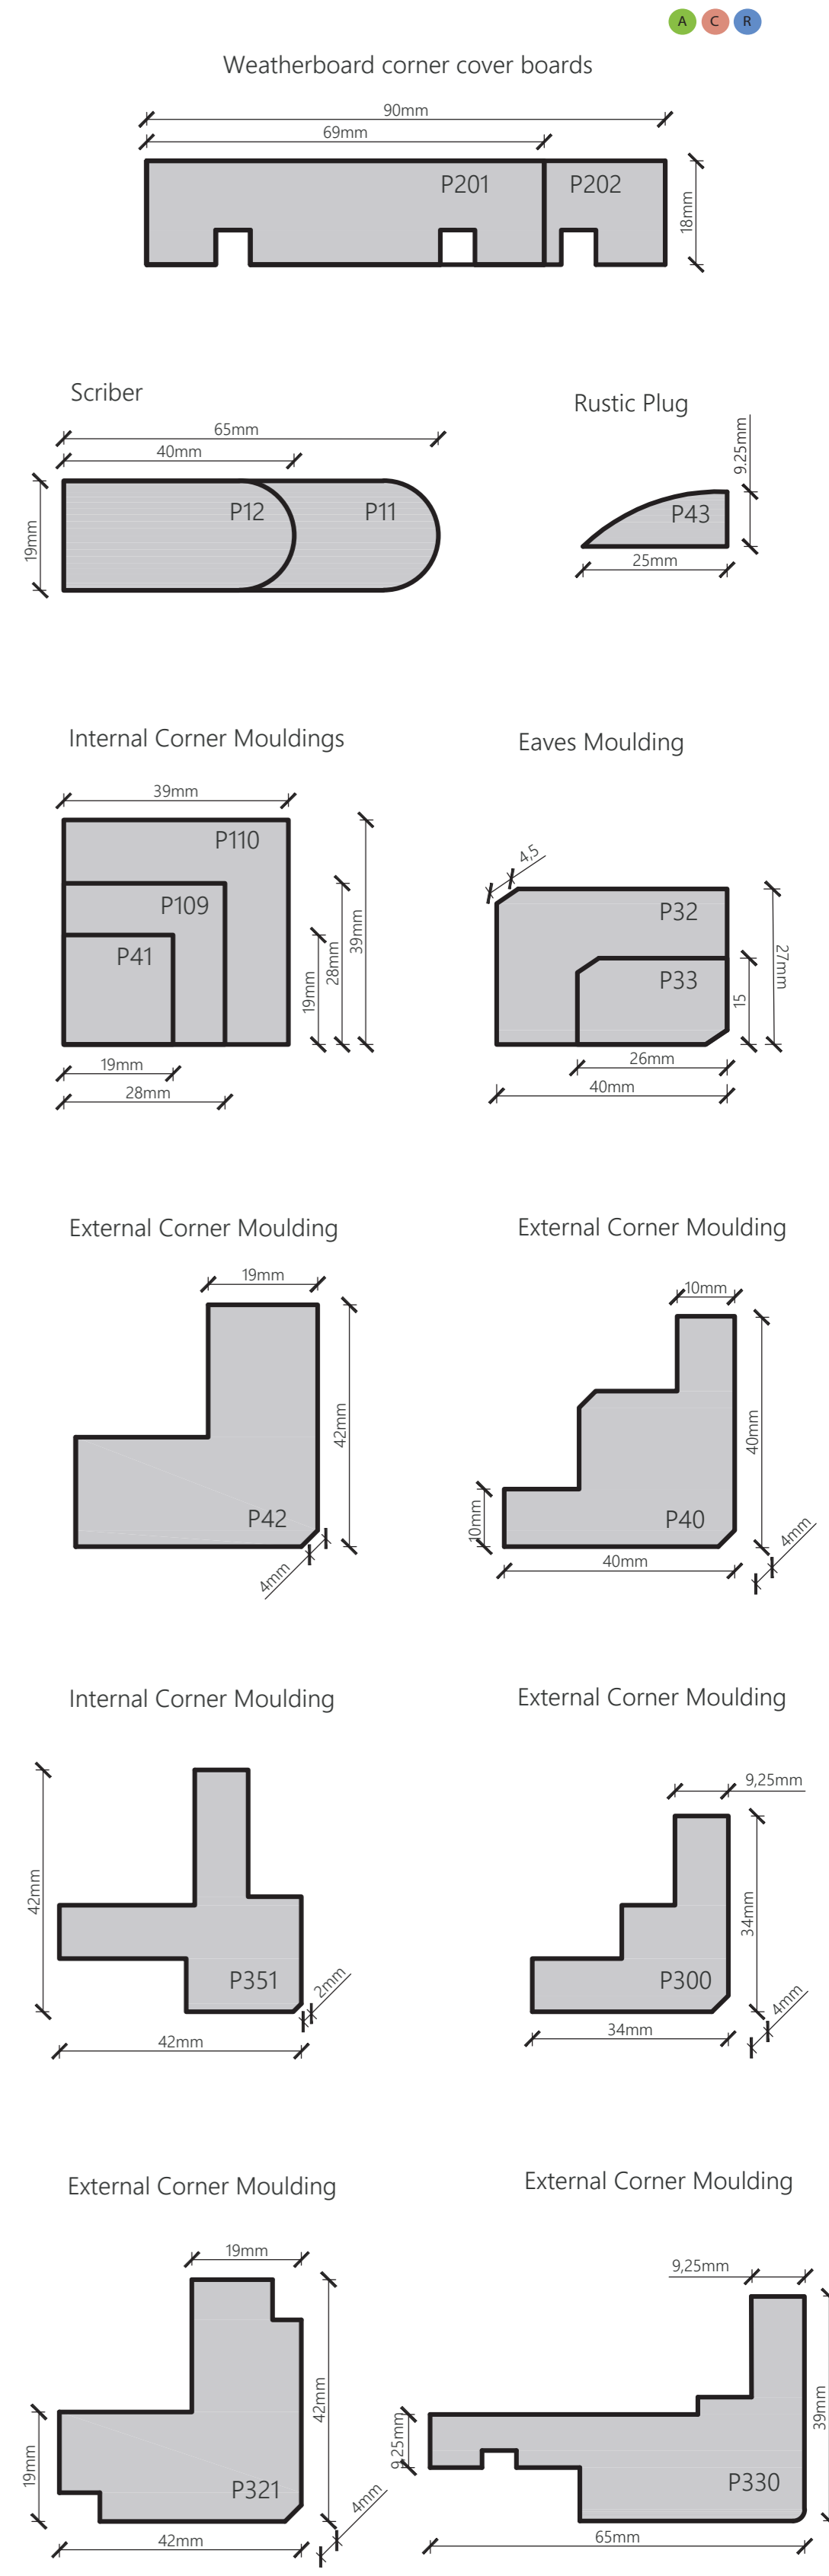

- Notes:
- All profiles are available in paint quality finish with a 2mm radius.
 - The chart above shows the standard profiles. Custom profiles are available on request at www.ititimspec.nz.
 - Thickness of profiles may vary depending on species. Generally thickness varies from 19mm & 32mm for Accoya, 19mm & 28mm for Radiata Pine and 18.5mm & 28mm for Western Red Cedar.
 - For New Zealand Building Code compliance & installation, please refer to ITI Timspec-CertClad manuals or email to sales@ititimspec.co.nz
 - Accoya and Radiata Pine are FSC® certified. (Look for our FSC® certified products).
 - Western Red Cedar is PEFC® certified.
 - Not all profiles are stocked but available on order.