

BORAL TIMBER
Build something great™



Boral Engineered Flooring







INSTALLATION METHODS

- Floating installation
- Glue down installation

www.boral.com.au/timber
National free call 1800 818 317



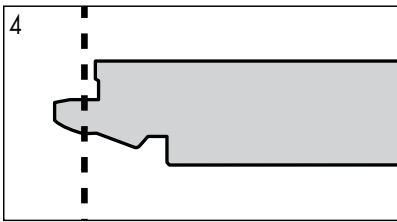

BORAL ENGINEERED FLOORING INSTALLATION INSTRUCTIONS

Thank you for purchasing Boral Engineered Flooring. Please read these instructions carefully prior to installation. We strongly recommend that these instructions are read in full prior to beginning your installation.

IN GENERAL

Boral Engineered Flooring is a floating timber floor meaning that the edges of each board are joined to each other using the glueless Uniclic joining system, and are not fixed to the sub-floor. Boral Engineered Flooring floats over an approved 2mm foam underlay and can be installed over any sound, dry and level surface. An expansion gap is left to the entire perimeter of the floor to allow for initial and seasonal expansion. The boards are generally installed along the length of the room with the ends of boards laid with a natural random stagger.

A successful installation will rely heavily on strict adherence to these instructions. The two most common causes of failure are uneven subfloors, and inadequate expansion to the perimeter of the floor. An uneven subfloor may lead to movement of the flooring underfoot and within the joining system, resulting in excessive noise, which often sound like "crackling" or "creaking".

TOOLS NEEDED

An installation Kit containing expansion wedges, a pulling iron and a tapping block. You will also require a jigsaw, pencil, hammer, tape measure, sharp "Stanley" type knife and small hand tools associated with wood working. Along with your Boral Engineered Flooring you'll need a quality underlay, and enough trims to complete your floor. Trims are available in a range of shapes, profiles and colours from your local retailer.

PREPARATION

The first thing that you need is to ensure that the subfloor or surface that the engineered wood floor is being installed over is level. Using a 1 metre straightedge, the subfloor level should not exceed +/- 3mm over 1 lineal metre in any direction. Remember, uneven floors may lead to movement and noise, so it is necessary to assess the levelness and get it right. Timber floors can be sanded level and concrete floors or existing floor coverings can usually be levelled using a self-levelling compound. Boral Engineered Flooring cannot be installed over carpet or carpet underlay but can be installed over well bonded vinyl, cork, ceramic tiles if sufficiently level.

Boral Engineered Flooring must always be installed over a continuous damp proof membrane. This continuous damp proof membrane can be provided by 200uM builders plastic, overlapped 300mm at the joints and taped with a vapour tight tape or by the use of Combi-lay underlay. Combi-lay underlays are manufactured with a plastic damp proof membrane on one side and are conveniently fitted with a 100mm overlap and peel & stick tape. Combi-lay is rolled out along the starting wall with the plastic down, peel & stick side to the wall. Additional rows are rolled out with tape down over the extended clear overlap. The wax tape can then be peeled away forming the continuous damp proof. Cut ends must be taped with a water proof tape.

In the instance of knowingly or logically wet subfloors, always use 200uM builders plastic sheeting, overlapping joints by 300mm, taping joints with waterproof tape and turning up at walls or vertical fixtures. Door frames and architraves should be undercut prior to commencing installation using a scrap of flooring and a long, flexible hand saw (Fig 10). Undercut saws may be available from your local retailer and are specifically designed for this purpose.

Work out the trims to be installed as some trims are easier to install prior to the flooring. This will be dependant on the direction of the trim to the flooring and the type of trim to be installed.

INSTALLING THE FIRST THREE ROWS

Select a starting wall that is long and visible, the first three rows will be installed parallel to this wall. Install the first row of plastic and/or underlay as required then install the first row, tongue (male) to the wall to assess the straightness of the starting wall. If the starting wall is undulating or uneven, square this row off to the other side of the room using a tape measure and scribe the first row of boards to cater for the undulations while accommodating a uniform 10-14mm expansion gap. If scribing is not required, remove the tongue along these starting boards (Fig 4). In the case of the required expansion gap, a minimum of 10mm is required in lower relative humidity environments like Melbourne or Hobart. A 14mm gap is required in areas of higher relative humidity like Queensland or Darwin. Remember that Boral Engineered Flooring may expand up to 4mm per LM in the width, as such the wider the floor, and the higher the humidity, the larger the perimeter gap should be. Now we will assemble the first 2 rows in a staggered formation as per diagram 5.5. This will provide a foundation for additional rows, it can be assembled away from the wall, then slid into position with minimum 10mm spacers installed along the wall and at the ends. The off-cut from the first 2 rows can now be used to start the 3rd row, providing it is longer than 300mm. If not, a new board will need to be cut to begin the 3rd row. Now install the 1st board of the 3rd row by rotating the long joint into position (Fig 1) and install the 10-15mm

spacer at the start of this row. Continue installing the floor left to right using the off cut from row 3 to begin row 4. (Note: Remember to ensure that you stagger end joints by greater than 300mm.) Any small gaps in the first three rows can be filled using a caulking compound in an appropriate colour.

THE BODY AND THE FINAL ROW

Continue installing the floor left to right. The final row will need to be trimmed to fit using a jigsaw and bought into place using the pulling iron (Fig 6). Remember to allow 10-14mm for your expansion gap at all walls and vertical surfaces. This gap will be covered last of all.

FINISHING OFF

Where skirting boards have been left in place, it is now time to fit scotia moulding to the perimeter of the floor to cover the expansion gap. Scotia is to be pinned to the skirting only so as not to inhibit the free movement of the floor. If skirting boards have been removed or are yet to be fitted, they will usually cover the expansion gap well. Install any End, Connector or Adapter profiles that have not been fitted during the installation process. These trims must hold the floor in place and provide for full and free expansion of the flooring. They should be anchored with adhesive and mechanically. Finally, any gaps at the floor perimeter that could not be covered with skirting or profiles, can be filled with a caulking compound in a matching colour. Any gaps between boards can also be filled at this time. Your engineered wood floor can now be cleaned and enjoyed.

SPECIAL NOTES

- 10mm is the minimum perimeter expansion gap for all applications. Larger floors or floors that will be exposed to higher levels of relative humidity will need larger expansion gaps. Some multi-room or very large installations will need expansion joints installed throughout the floor. In most cases, multi-room installations will need to be separated at doorways using connector trims, a range of which are available from your local retailer. Your retailer will be able to advise you in this regard.
- Boral Engineered Flooring floor can be direct stuck to a prepared subfloor. We recommend the use of Mapei Ultraset adhesive used as instructed, along with their recommended ancillary products.
- When installing Boral Engineered Flooring on stairs, glue both tread and riser using a recommended polyurethane or construction adhesive. No underlay should be used on tread or riser. Special stair nosing trims are also available for this application.
- It is the installer's responsibility to check each board for faults or defects, in appropriate finished lighting conditions, prior to installation.
- Boral Engineered Flooring is not designed to be exposed to extremes of humidity or temperature. It is important to note that floors exposed to such conditions may fail. Sensible protection of the flooring from such extremes, particularly in unoccupied homes, must be afforded. Measures can include curtains, awning, blinds, window tinting, and early commissioning and/or regular use of air conditioning or humidity control devices. Protection of the flooring from any radiant heat source should also be provided, eg: around combustion heaters and other heaters, as these generate extreme low humidity. Boral Engineered Flooring should not be installed until these measures are in place, and should not be installed more than 2 weeks prior to occupation of the home. It is important to understand that any warranty, expressed or implied, may be voided if the floor is exposed to extreme conditions.
- It is the homeowner's responsibility to provide a moderate indoor environment in order to prevent cracking and distortion of the flooring, even when unoccupied.

MAINTENANCE

Like all timber floors Boral Engineered Flooring will mark and scratch. However, it can be re-coated or re-sanded as required, just like traditional wood flooring in order to maintain your floor;

- Sweep or vacuum (bristles down) your floor regularly to remove stones and abrasive grit or dirt.
- Install dirt trapping mats at external entrances.
- Apply felt floor protectors to the underside of all moving furniture to reduce marking or scratching.
- Damp clean using a barely moist mop. For best results, add one capful of Timber Cleaner to your water and towel off any excess moisture immediately after damp mopping.

Full Maintenance Instructions can be obtained from your local retailer.

Boral® and Build something great™ are registered trade marks of Boral Limited or one of it's subsidiaries

Note: Variations of colour within a timber species are normal, therefore photographs, samples and display floors can only be indicative of the colour range of the timber species nominated. Timber is a natural product and commonly reacts to changes in atmospheric conditions such as humidity and temperature. This is considered normal. It is recommended that these species are viewed at a timber flooring showroom before a decision is made on colour.

Again, thank you for your purchase.

BCC_13564_5/15

